


Features:

- RF Frequency: 2 - 6 GHz
- Small signal gain: 13.33 dB
- Output P1dB: 25 dBm
- Saturated Output Power: 27.5 dBm
- DC drain bias voltage: 5 V
- DC gate bias voltage: - 0.3 V
- DC supply current: 320 mA
- 0.1um GaAs pHEMT Technology
- Die Size: 0.9 mm * 2.6 mm

Functional Block Diagram

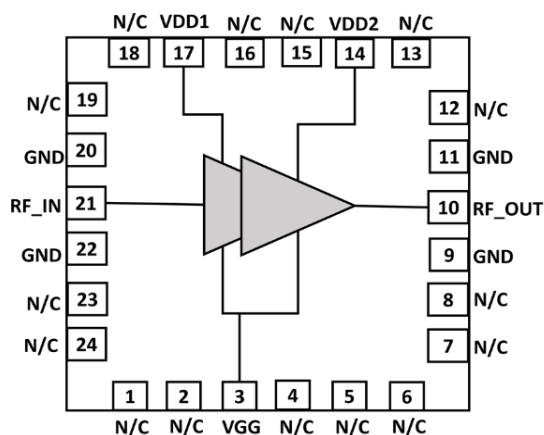

Description:

RFPA06 is Two Stage Power Amplifier operates from 2 - 6 GHz and it is used to drive the high-power amplifier. The amplifier provides 13.33 dB of small signal gain. The input and output are matched to 50 ohms with on-chip DC blocking capacitors.

The device is specifically designed for use in 2-6 GHz frequency in Bluetooth, Zigbee, WiFi, IoT and SATCOM Application.

The Technology used to design PA is 0.1um GaAs pHEMT Process.

Pin Configuration

Pin No.	Pin Name	Description
1,2,4,5,6,7,8,12,13,15,16,18,19,23,24	N/C	Not Connected
9,11,20,22	GND	Ground
17	VDD1	Drain Bias Voltage 1
14	VDD2	Drain Bias Voltage 2
3	VGG	Gate Bias Voltage
21	RF-IN	RF Input
10	RF-OUT	RF Output

Applications:

- Weather radar
- Microwave devices
- Communications
- Long-distance radio telecommunications
- Surface ship radar

Deliverables:





- Packaged ready Die
- Test Results
- Product Datasheet

Electrical Specification:





Freq= 2 - 6 GHz, VDD1=VDD2= 5 V, VGG1= - 0.3 V, ID= 320 mA, Zo=50 Ω

Parameters	Test Condition	Units	Typ
Gain	2 GHz	dB	5.89
	4 GHz		13.33
	6 GHz		10.74
Output P1 dB	2 GHz	dBm	
	4 GHz		25
	6 GHz		
OIP3 Pin= 1 dBm Δf = 50MHz	2 GHz	dBm	
	4 GHz		38
	6 GHz		
Input Return Loss	2 GHz	dB	13.52
	4 GHz		17.64
	6 GHz		9.40
Output Return Loss	2 GHz	dB	11.86
	4 GHz		3.95
	6 GHz		1.58
Operating Bias Conditions			
Drain Current (Id)	-	mA	320
Drain Voltage (VDD)	-	V	5
Gate Voltage (VGG)	-	V	-0.3


On Wafer Measured Performance Curve:

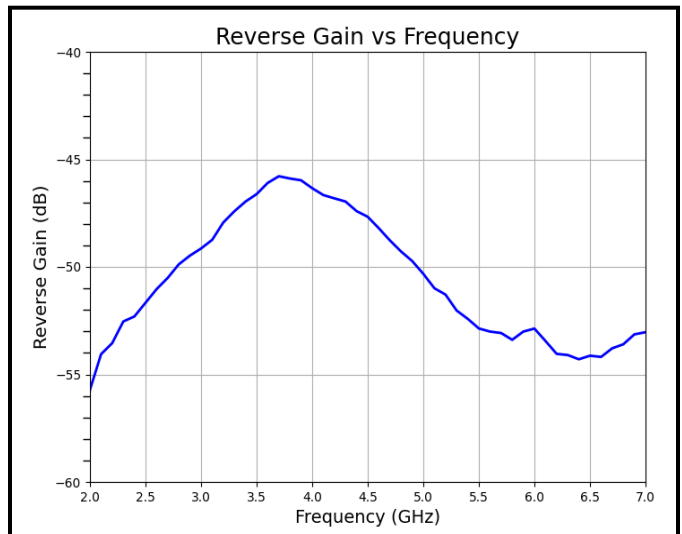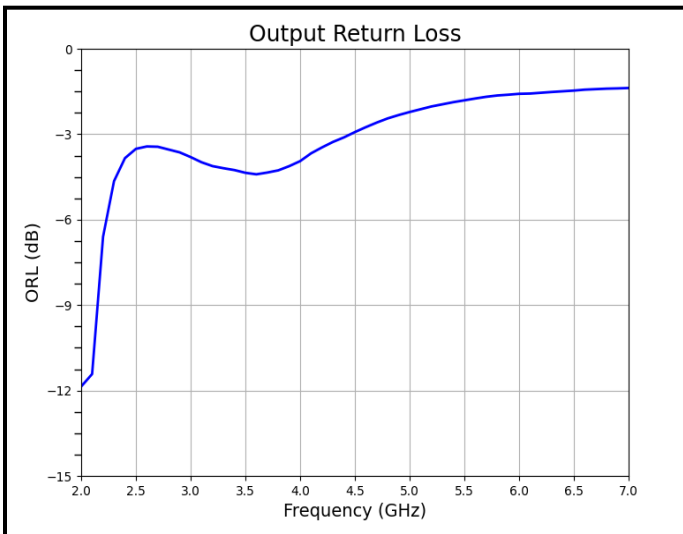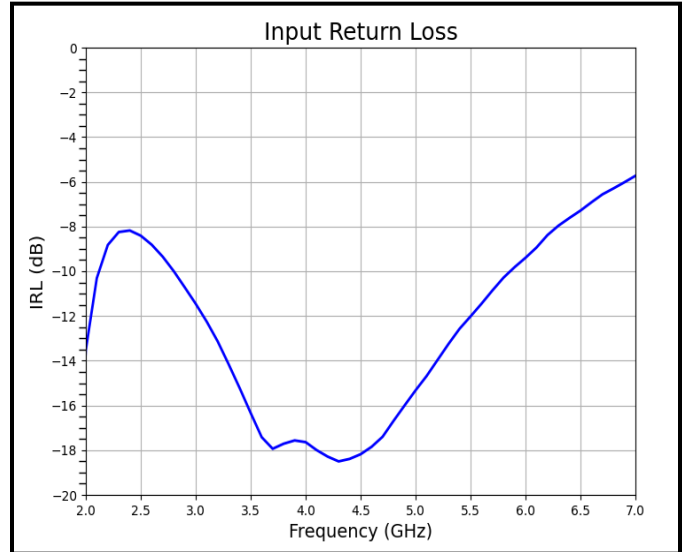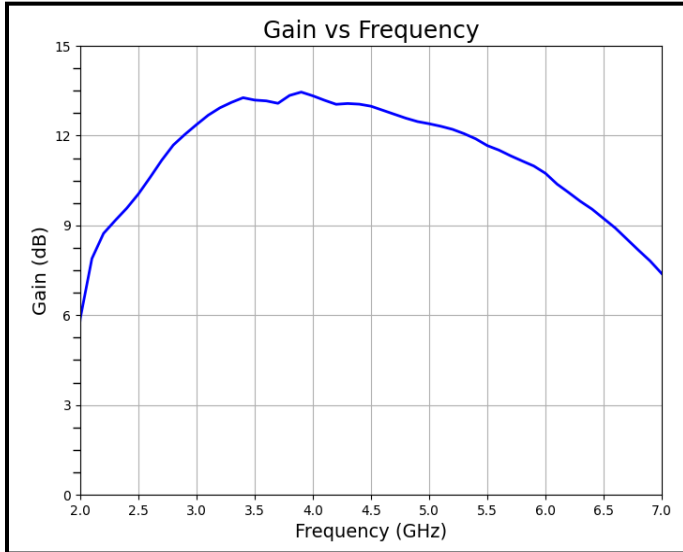

Typical Performance Curves:

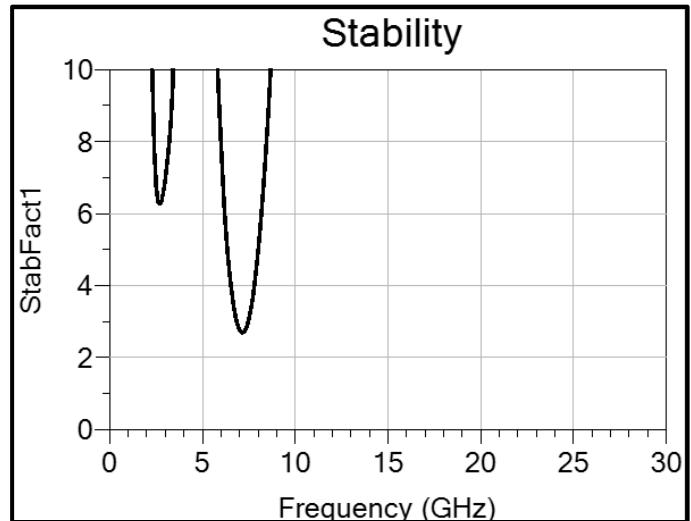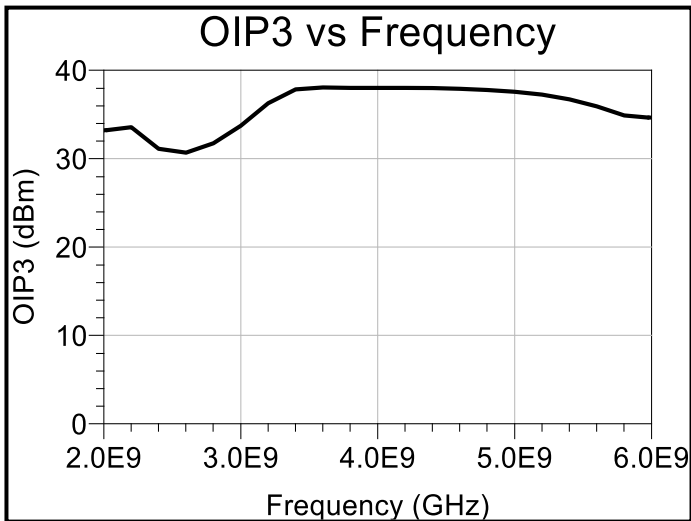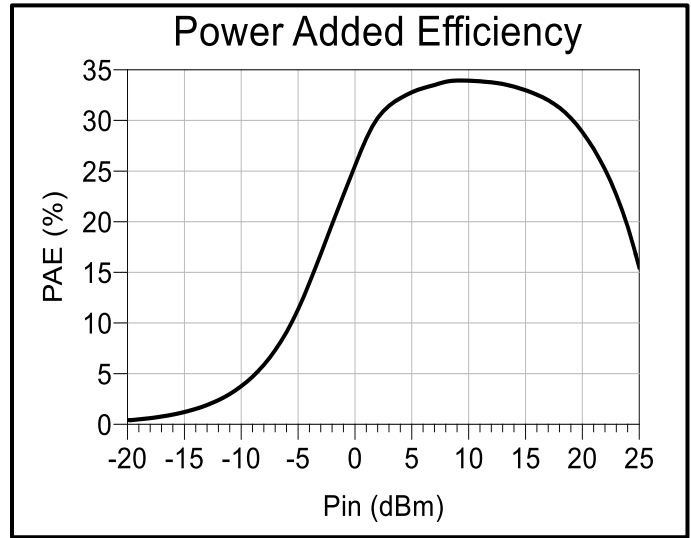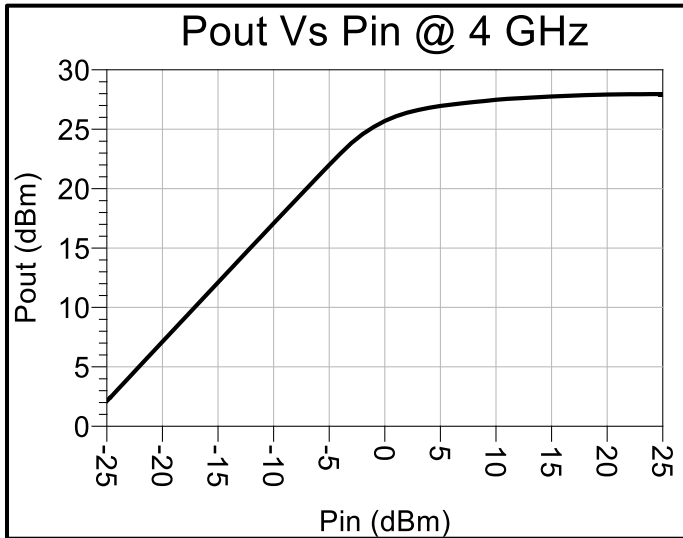

Application Diagram:

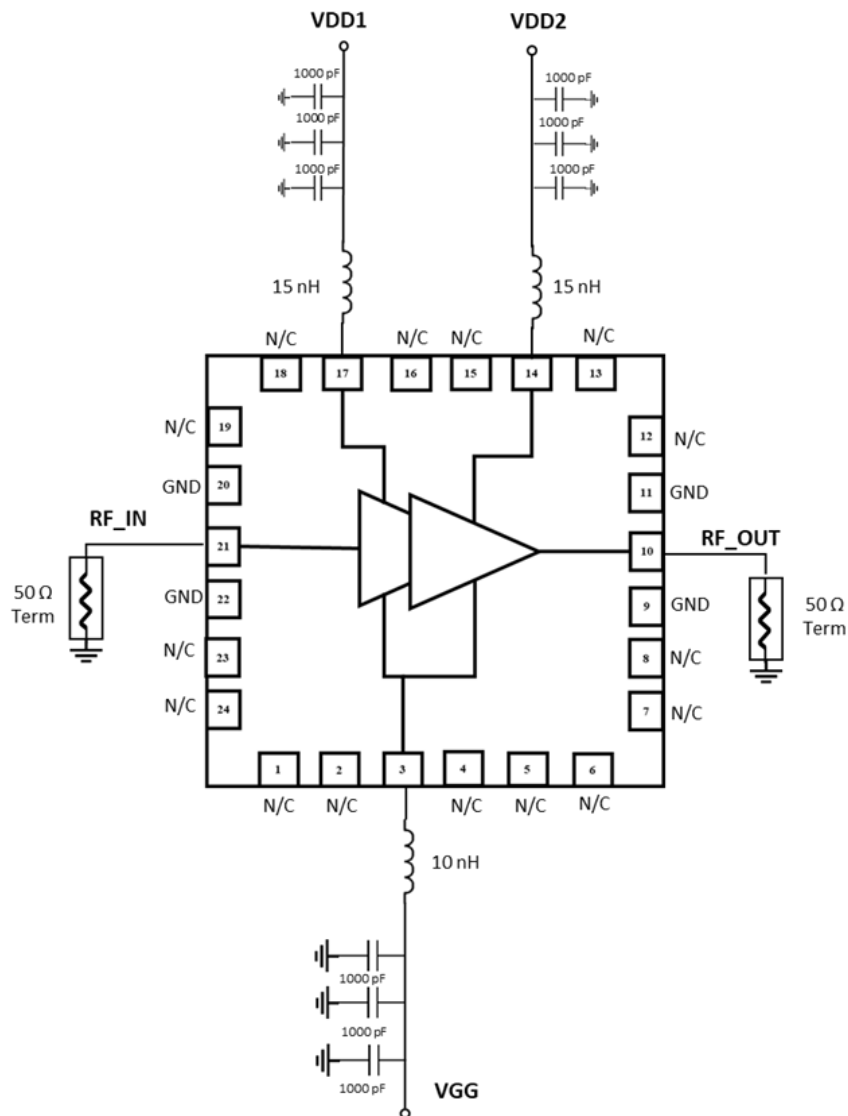

Disclaimer:

Information in this document is provided in connection with Millimeter Chips Pvt. Ltd. products. These materials are provided by Millimeter Chips Pvt. Ltd. as a service to its customers and may be used for informational purposes only. Except as provided in Millimeter Chips Pvt. Ltd. Terms and Conditions of Sale for such products or in any separate agreement related to this document, Millimeter Chips Pvt. Ltd. assumes no liability whatsoever. Millimeter Chips Pvt. Ltd. assumes no responsibility for errors or omissions in these materials. Millimeter Chips Pvt. Ltd. may make changes to specifications and product descriptions at any time, without notice. Millimeter Chips Pvt. Ltd. does not commit to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

Contact information:

For the latest specifications, additional product information:

Web: www.millimeterchips.co.in

Email: smoghe@rficsolutions.com

Tel: USA - (+1) 840 356 8957,

IND - (+91)9022078131, (+91)8485841789